


SIDE VIEW

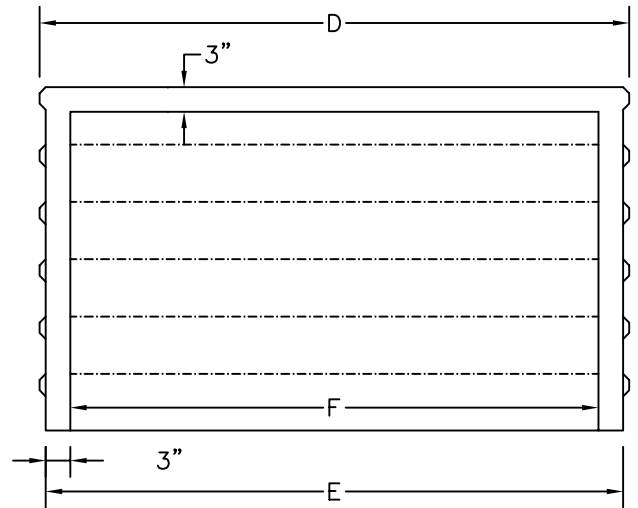

END VIEW

| RISER | A NO PLAT | A 42" PLAT | B HEIGHT |
|-------|--------------|---------------|-------------|
| 1 | 12" | 40½" | 7½" |
| 2 | 24" | 52½" | 15" |
| 3 | 36" | 64½" | 22½" |
| 4 | 48" | 76½" | 30" |
| 5 | 60" | 88½" | 37½" |
| 6 | 72" | 100½" | 45" |
| 7* | 84" | 112½" | 52½" |

| D WIDTH | E OUTSIDE CORE WIDTH | F INSIDE CORE WIDTH | C PLATFORM LENGTH |
|------------|----------------------------|---------------------------|-------------------------|
| 4' | 45½" | 39½" | 42" |
| 5' | 57½" | 51½" | 42" |
| 6' | 70" | 63½" | 42" |
| 7' | 81" | 74½" | 42" |
| 8' | 94" | 86" | 42" |
| 10' | 118½" | 110½" | 42" |

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. WROUGHT IRON RAILS OPTIONAL.
3. LIMESTONE TREADS OPTIONAL.
4. TREADS AND PLATFORM BROOM FINISHED.
5. WIDTH (E) INCREASES BY 1" FOR BRICK STEPS.
- *6. 7 RISER AVAILABLE IN 5', 6' AND 7' WIDE ONLY.

E. F. SHEA
NEW ENGLAND
CONCRETE PRODUCTS, INC.

BRICK STEPS
 WIDTH: 4', 5', 6', 7', 8', 10'