
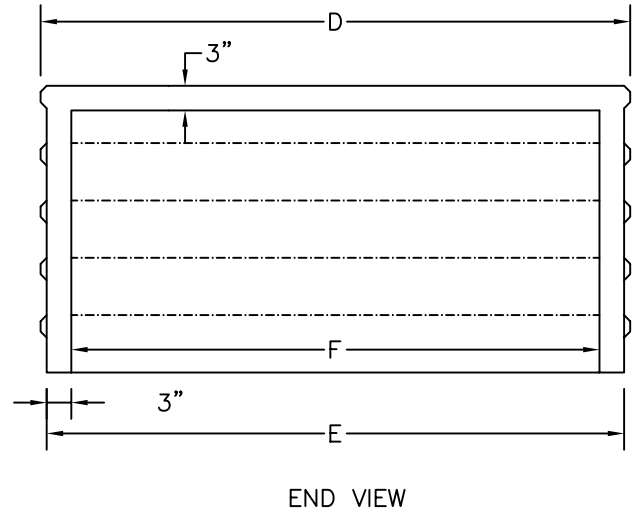


WEIGHT	RISERS						
	WIDTH	1	2	3	4	5	6
4'	700#	1,067#	1,433#	1,800#	2,167#	2,167#	
5'	938#	1,363#	1,789#	2,214#	2,640#	3,065#	
6'	1,176#	1,660#	2,144#	2,629#	3,112#	3,596#	
7'	1,369#	1,911#	2,454#	2,997#	3,540#	4,083#	
8'	1,561#	2,162#	2,764#	3,365#	3,967#	4,569#	
10'	1,945#	2,664#	3,353#	4,032#	4,735#	5,454#	

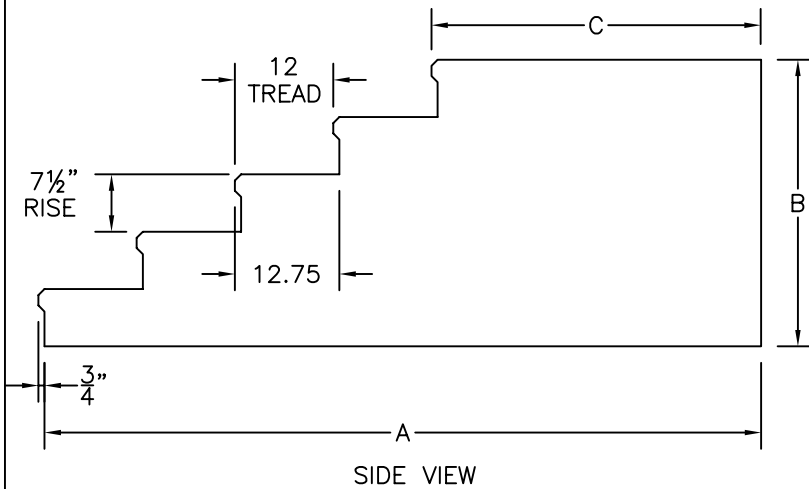

RISER	A NO PLAT	A 42" PLAT	B HEIGHT
1	12"	40 1/2"	7 1/2"
2	24"	52 1/2"	15"
3	36"	64 1/2"	22 1/2"
4	48"	76 1/2"	30"
5	60"	88 1/2"	37 1/2"
6	72"	100 1/2"	45"
7*	84"	112 1/2"	52 1/2"

D WIDTH	E OUTSIDE CORE WIDTH	F INSIDE CORE WIDTH	C PLATFORM LENGTH
4'	45 1/2"	39 1/2"	42"
5'	57 1/2"	51 1/2"	42"
6'	70"	63 1/2"	42"
7'	81"	74 1/2"	42"
8'	94"	86"	42"
10'	118 1/2"	110 1/2"	42"

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. WROUGHT IRON RAILS OPTIONAL.
3. BRICK OR BRICK & LIMESTONE OPTIONAL.
4. TREADS AND PLATFORM BROOM FINISHED.
5. WIDTH (E) INCREASES BY 1" FOR BRICK STEPS.
- *6. 7 RISER AVAILABLE IN 5', 6' AND 7' WIDE ONLY.

E. F. SHEA
NEW ENGLAND
CONCRETE PRODUCTS, INC.

STEPS STANDARD
 WIDTH: 4', 5', 6', 7', 8', 10'
 7 1/2" RISERS