


PLAN VIEW

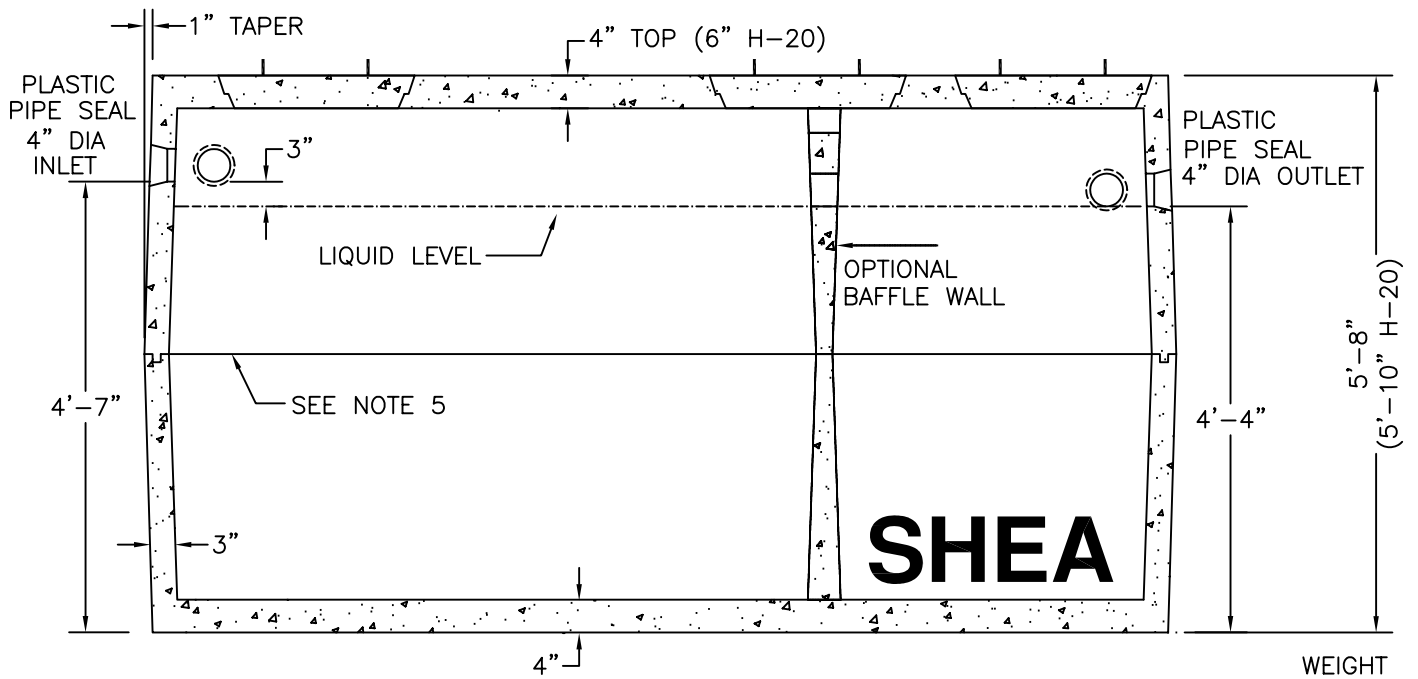

SECTION VIEW

WEIGHT

ITEM NO.	TK-1500	STANDARD	11,670#
	TK-1500	H-20	13,135#
	TK-15002C	STANDARD	12,930#
	TK-15002CH	H-20	14,395#

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227-93.
4. BAFFLE WALL OPTIONAL FOR TWO COMPARTMENT TANKS.
5. TEES AND GAS BAFFLE SOLD SEPARATELY.
6. TONGUE & GROOVE JOINT SEALED WITH BUTYLE RESIN.
7. ALSO AVAILABLE IN H-20 LOADING.

E. F. SHEA
NEW ENGLAND
CONCRETE PRODUCTS, INC.

SEPTIC TANK
1500 GALLON