


PLAN VIEW

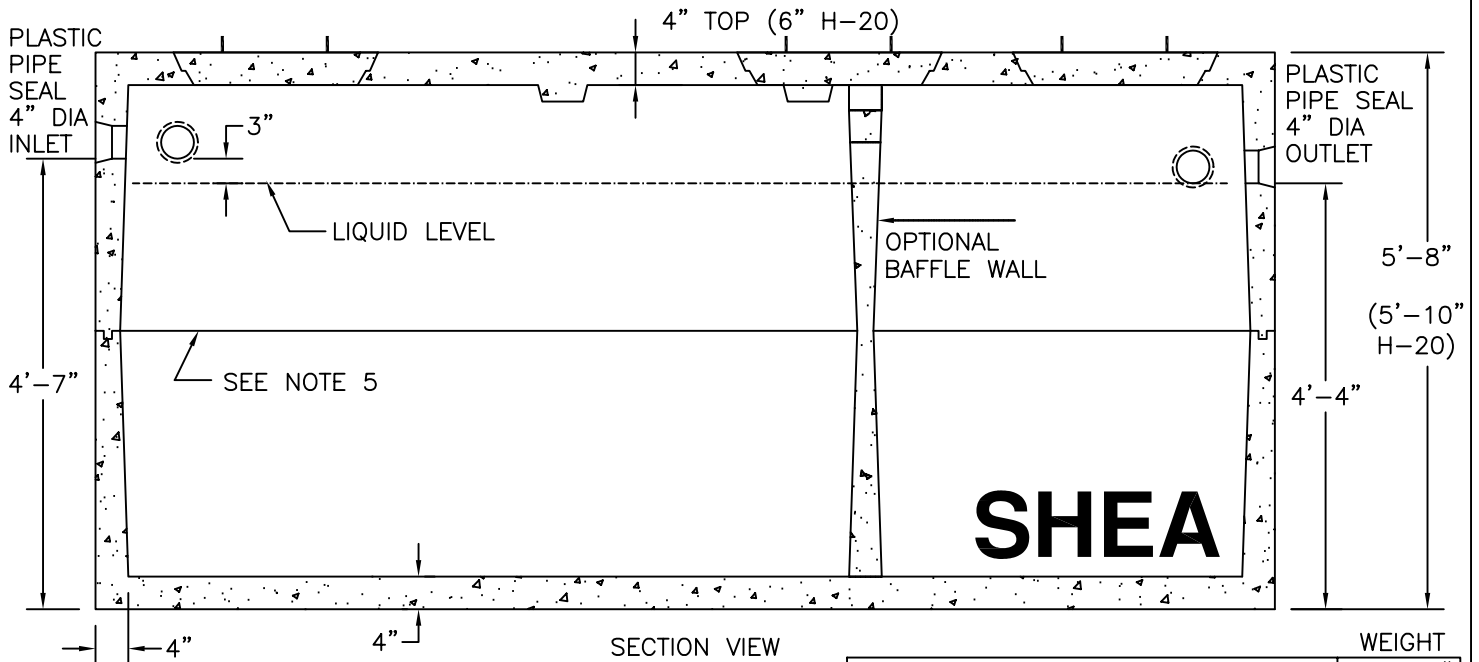

SECTION VIEW

ITEM NO.	TK-2000	STANDARD	WEIGHT
	TK-2000	H-20	14,245#
	TK-20002C	STANDARD	16,170#
	TK-20002CH	H-20	15,685#
			17,610#

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227-93.
4. BAFFLE WALL OPTIONAL FOR TWO COMPARTMENT TANKS.
5. TEES AND GAS BAFFLE SOLD SEPARATELY.
6. TONGUE & GROOVE JOINT SEALED WITH BUTYLE RESIN.
7. ALSO AVAILABLE IN H-20 LOADING.

E. F. SHEA
NEW ENGLAND
CONCRETE PRODUCTS, INC.

SEPTIC TANK
 2000 GALLON