


PLAN VIEW

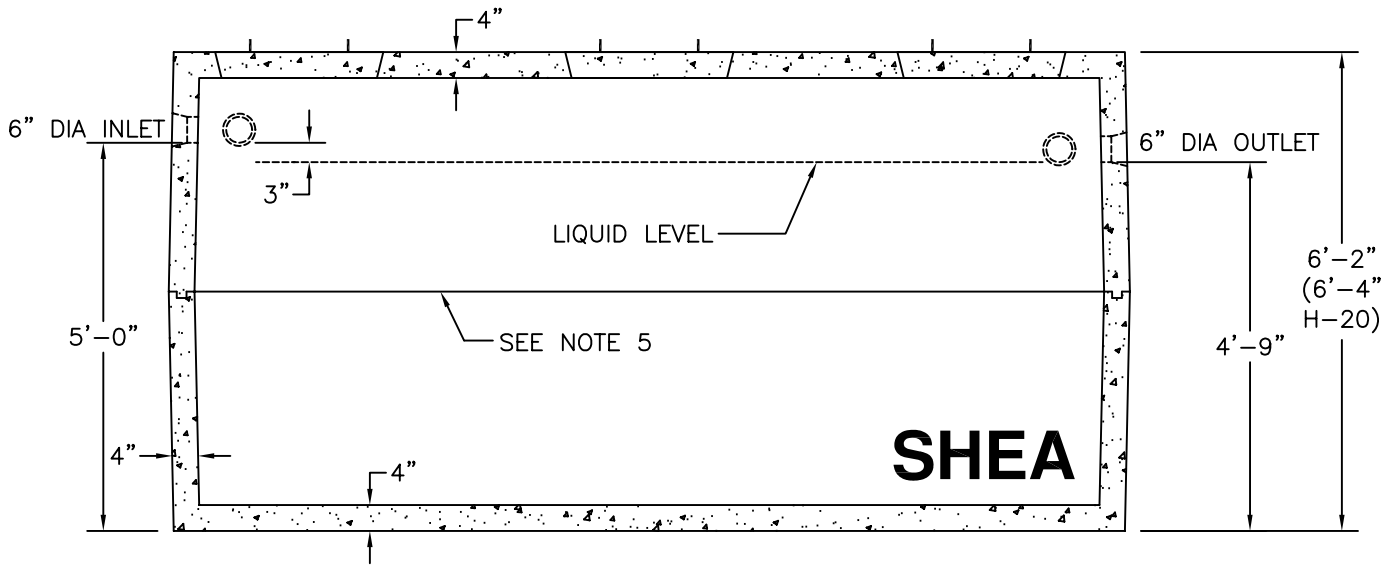

SECTION VIEW

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227-93.
4. TONGUE & GROOVE JOINT SEALED WITH BUTYLE RESIN.
5. TEES AND BAFFLES SOLD SEPARATELY.
6. ALSO AVAILABLE IN H-20 LOADING.

WEIGHT	
ITEM NO. TK 2500	21,760#

**E.F. SHEA**  
**NEW ENGLAND**  
**CONCRETE PRODUCTS, INC.**

SEPTIC TANK  
 2500 GALLON