


TOP VIEW

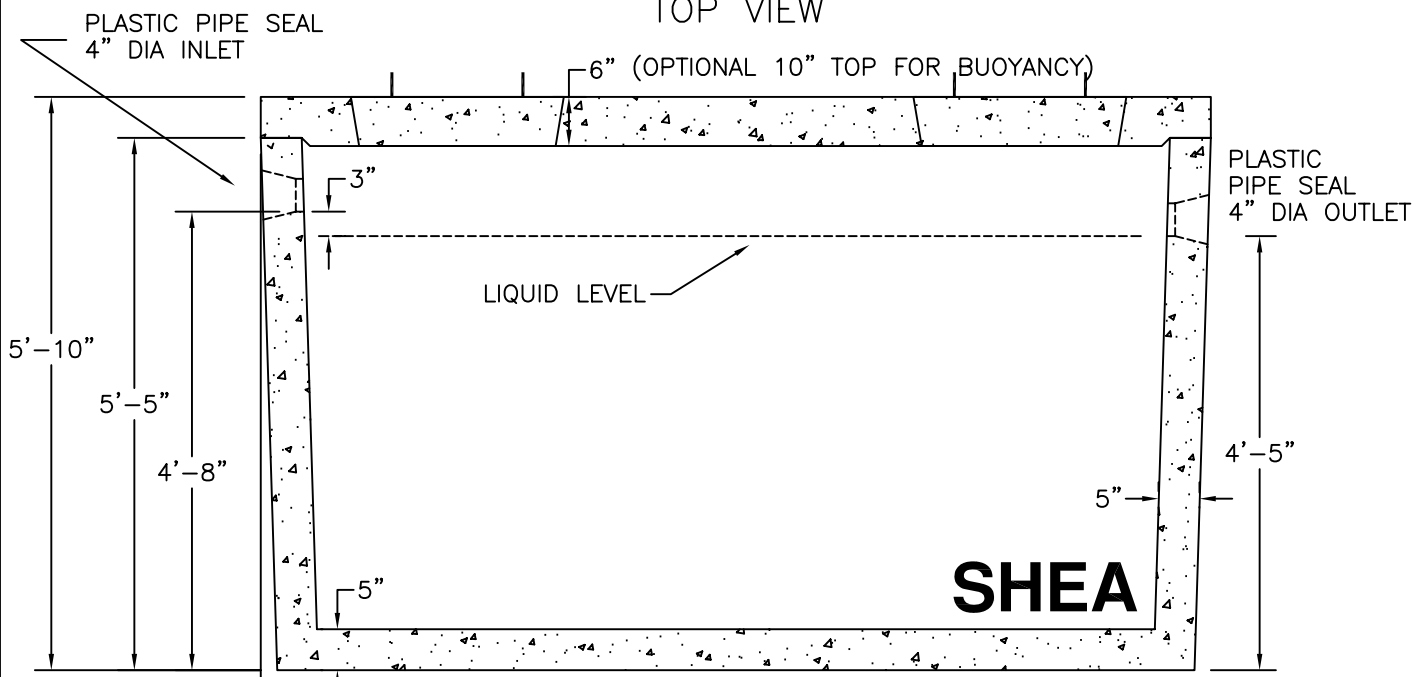

SECTION VIEW

WEIGHT:
 BOTTOM = 11,250#
 10" TOP = 5,960#
 6" TOP = 3,575#

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227-93.
4. TEES AND GAS BAFFLE SOLD SEPARATELY.
5. TONGUE & GROOVE JOINT SEALED WITH BUTYLE RESIN.
6. ALSO AVAILABLE IN H-20 LOADING.

ITEM NO.	M1000	STANDARD (6" TOP)
	M1000H	H-20 (6" TOP)

E. F. SHEA
 NEW ENGLAND
 CONCRETE PRODUCTS, INC.

SEPTIC TANK MONOLITHIC
 1000 GALLON
 5" WALL