


PLAN VIEW

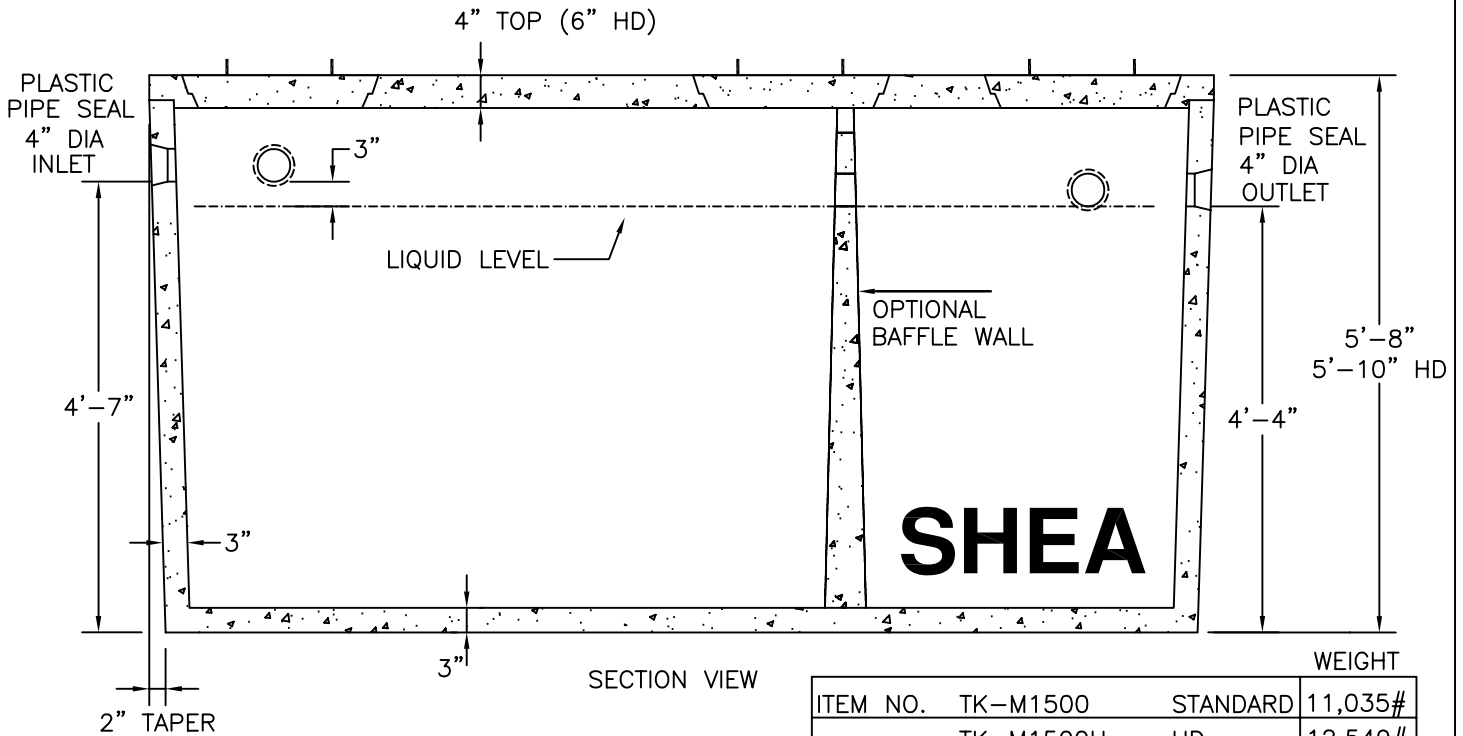

WEIGHT

ITEM NO.	TK-M1500	STANDARD	11,035#
	TK-M1500H	HD	12,549#
	TK-M15002C	STANDARD	11,641#
	TK-M15002CH	HD	13,155#

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227-93.
4. BAFFLE WALL OPTIONAL FOR TWO COMPARTMENT TANKS.
5. TEES AND GAS BAFFLE SOLD SEPARATELY.
6. TONGUE & GROOVE JOINT SEALED WITH BUTYLE RESIN.
7. ALSO AVAILABLE IN H-20 LOADING.

E. F. SHEA

**NEW ENGLAND
CONCRETE PRODUCTS, INC.**

SEPTIC TANK MONOLITHIC
1500 GALLON
3" WALL