


PLAN VIEW

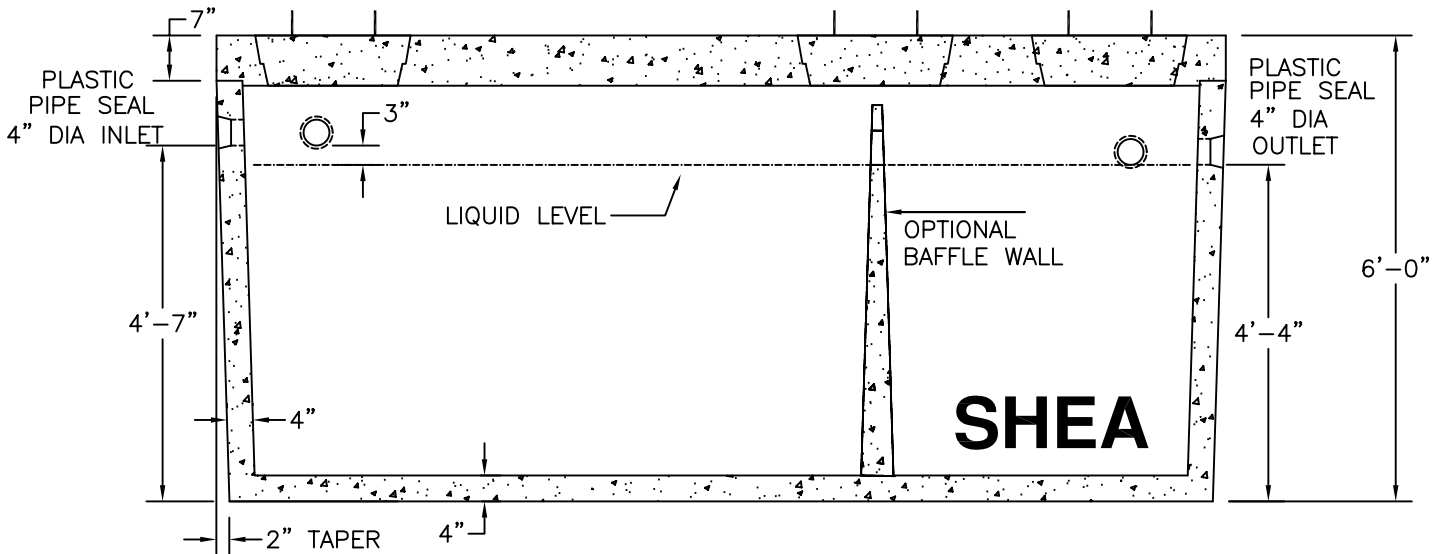

SECTION VIEW

			WEIGHT
ITEM NO.	TK-M2000	STANDARD	21,225#
	TK-M2000H	H2O	21,225#
	TK-M20002C	STANDARD	22,325#
	TK-M20002CH	H2O	22,325#

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227-93.
4. BAFFLE WALL OPTIONAL FOR TWO COMPARTMENT TANKS.
5. TEES AND GAS BAFFLE SOLD SEPARATELY.
6. TONGUE & GROOVE JOINT SEALED WITH BUTYLE RESIN.
7. ALSO AVAILABLE IN H-20 LOADING.

**NEW ENGLAND
CONCRETE PRODUCTS, INC.**

SEPTIC TANK MONOLITHIC
2000 GALLON