


PLAN VIEW

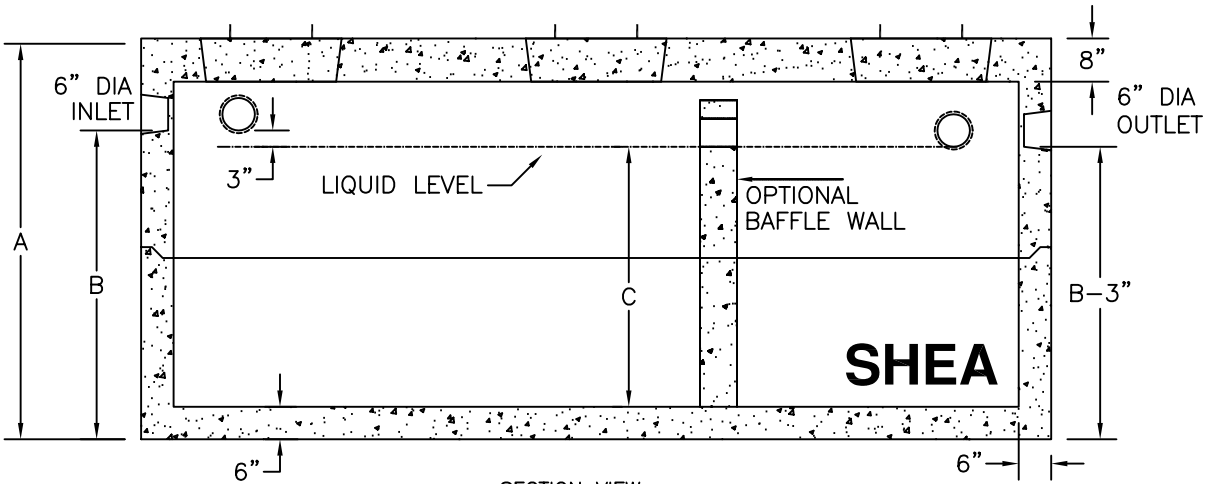

SECTION VIEW

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227-93.
4. DESIGNED FOR H-20 LOADING.
5. TONGUE & GROOVE JOINT SEALED WITH BUTYLE RESIN.
6. TEES AND BAFFLES SOLD SEPARATELY.

SINGLE COMPARTMENT TANK

GALLONS	A (HEIGHT)	B (INLET)	C (LIQUID)	WEIGHT (LBS)	ITEM NO.
3,000	83"	66"	57"	37,220	CTK-3000
3,500	94"	77"	68"	39,810	CTK-3500
4,000	103"	86"	77"	42,400	CTK-4000

TWO COMPARTMENT TANK

GALLONS	A (HEIGHT)	B (INLET)	C (LIQUID)	WEIGHT (LBS)	ITEM NO.
3,000	83"	66"	57"	40,200	CTK-30002C
3,500	94"	77"	68"	43,220	CTK-35002C
4,000	103"	86"	77"	46,240	CTK-40002C

E. F. SHEA
NEW ENGLAND
CONCRETE PRODUCTS, INC.

COMMERCIAL LINE TANK
 3000 TO 4000 GALLON