


PLAN VIEW

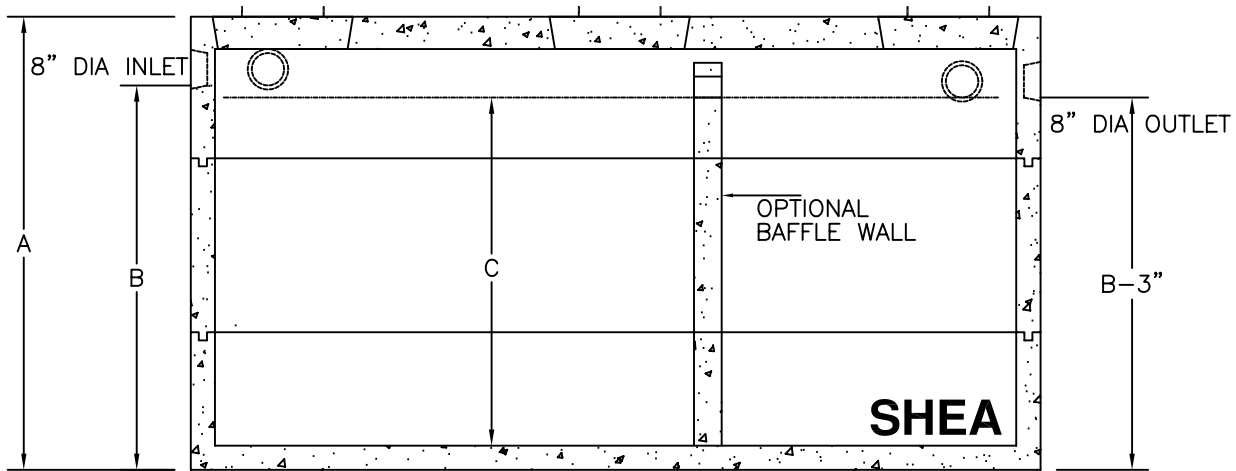

SECTION VIEW

GALLONS	A (HEIGHT)	B* (INLET)	C (LIQUID)	WEIGHT (LBS)
2,500	63"	46'	37"	40,770
3,000	70"	53"	44"	43,240

*SEE NOTE 5

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS FOR ALTERNATIVE SYSTEMS WHERE A LIQUID LEVEL OF FOUR FEET IS NOT FEASIBLE.
3. ALL REINFORCEMENT PER ASTM C1227-93.
4. DESIGNED FOR H-20 LOADING, COVER 1-5 FT.
5. TONGUE AND GROOVE JOINT SEALED WITH BUTYL RESIN. INLET HEIGHT MAY INCREASE SLIGHTLY DUE TO THE BUTYL RESIN USED.
6. TEES AND BAFFLES SOLD SEPARATELY.

E. F. SHEA
NEW ENGLAND
CONCRETE PRODUCTS, INC.

COMMERCIAL LINE TANK
 2500 TO 3000 GALLON
 LEDGE TANK