


THIS WALL SECTION
IS FOR A SPECIFIC SET
OF SITE CONDITIONS.

EACH WALL SHOULD BE PROPERLY
DESIGNED AND ENGINEERED
FOR SITE CONDITIONS

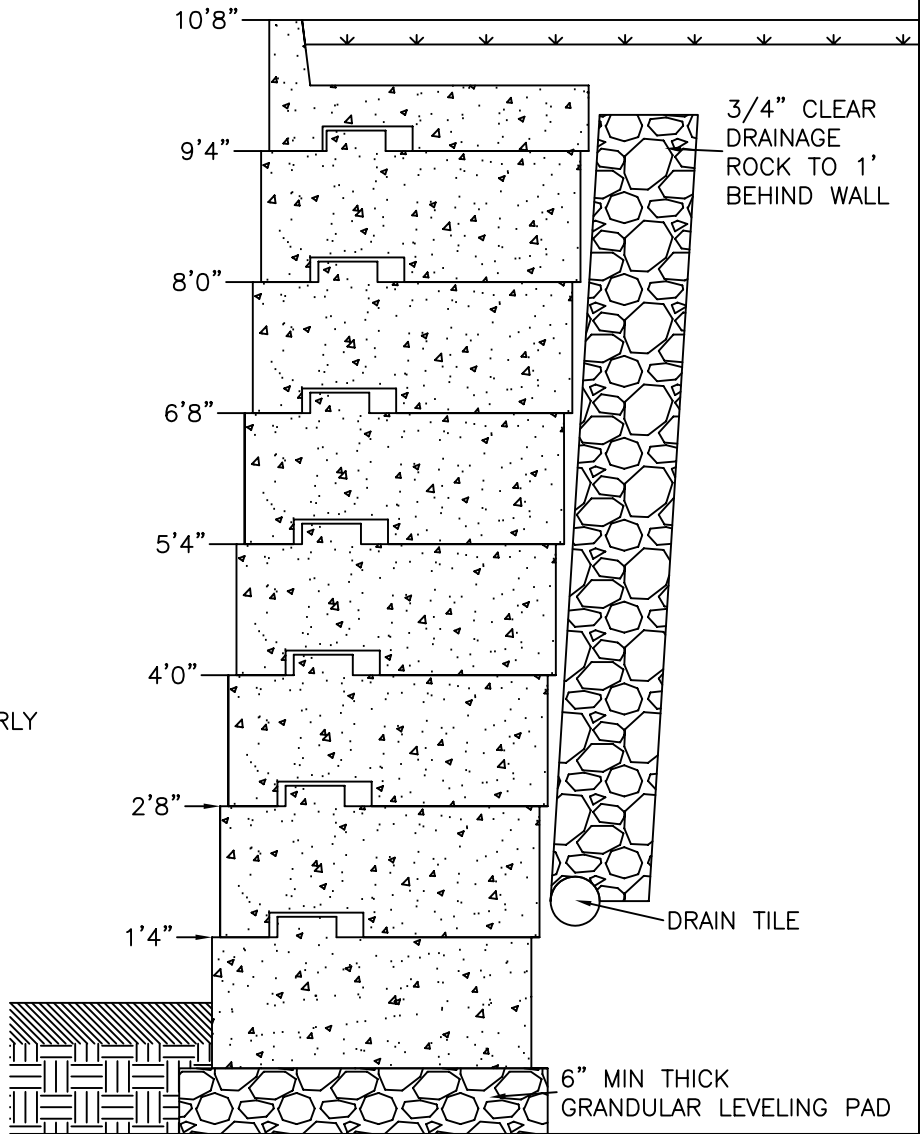

KEY ASSUMPTIONS AND NOTES:

1. MAXIMUM HEIGHT NON REINFORCED WALLS IN SILTY CLAY (SOIL FRICTION ANGLE $\phi=28^\circ$) IS 10'8", 9'4", AND 5'4" FOR 45", 39", AND 24" BLOCKS. TALLER WALLS BUILT WITH GEO-GRID OR SET-BACK EFFECT.
2. CONCRETE: 3,000 PSI MINIMUM AFTER 28 DAYS.
3. FACE TEXTURE IS NORTH SHORE GRANITE
4. MINIMUM TURNING RADIUS 15 FEET.
5. 1" SETBACK PER ROW ON A STRAIGHT WALL (ANGLE OF BATTER 3.6°) CURVED WALL 1-2.7" PER ROW.
6. CORNER BLOCK CUT FOR USE ON LEFT AND RIGHT SIDE.

E.F. SHEA
NEW ENGLAND
CONCRETE PRODUCTS, INC.

SHEA WALL SYSTEM
TYPICAL WALL SECTION